


NOTES:

- 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
- ASSEMBLY SHOWN AS INSTALLED IN REINFORCED POURED CONCRETE SLAB.
- MINIMUM SLAB THICKNESS IS 8".

IMPORTANT:

- FALL ARREST SAFETY ANCHORS ARE DESIGNED TO A TYPICAL MAXIMUM FALL ARRESTING FORCE OF 1,800 lbs. (8.0 KN) WHEN WEARING A BODY HARNESS, WITH A FACTOR OF SAFETY OF 2 WITHOUT ANY PERMANENT DEFORMATION, AND TO 5,000 lbs. (22.2 KN) AGAINST FRACTURE OR DETACHMENT.
- IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

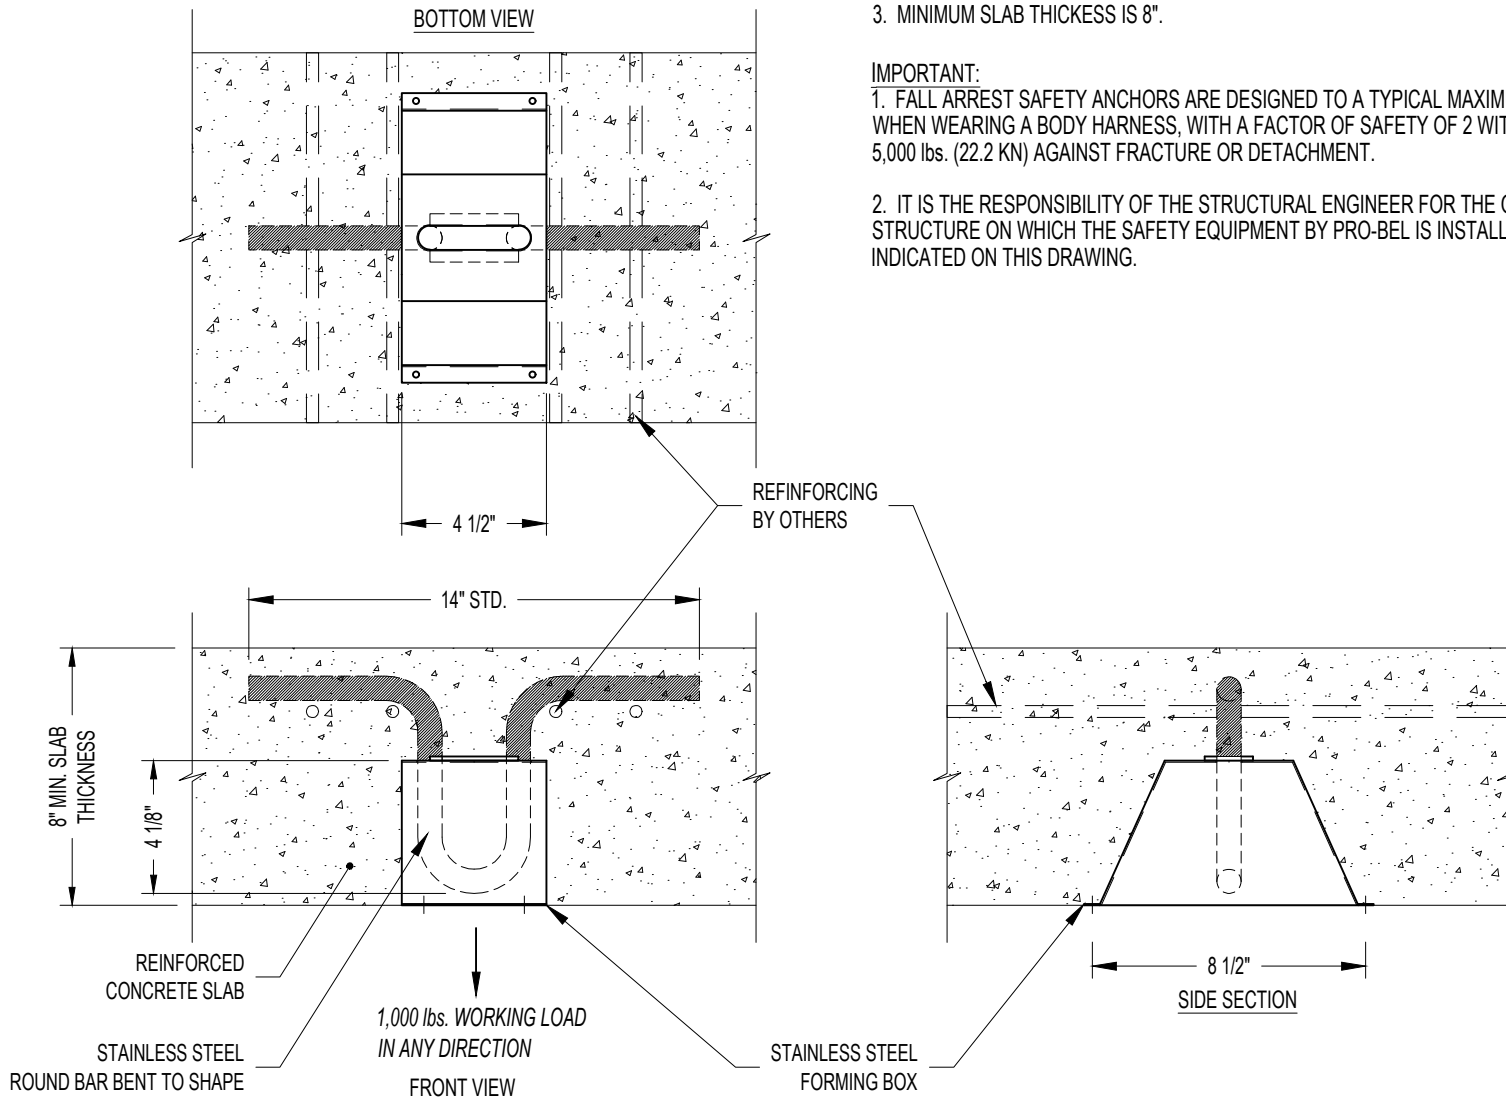

PB70RS1: CAST IN PLACE RECESSED SOFFIT ANCHOR