


NOTES:

1. 2,200 lbs. WORKING LOAD IN LINE WITH HLL CABLE (WHEN USING PRO-BEL IN LINE SHOCK ABSORBER- PRO-SHOCK).
2. ASSEMBLY SHOWN IS 12", 15", 18" HIGH MODELS FOR STANDARD SLAB THICKNESS OF 4" TO 12".
3. ASSEMBLY NOT TO BE USED FOR COMPOSITE CONCRETE AND METAL DECKING.
4. ASSEMBLY SHOWN WITH CONVENTIONAL SINGLE PLY ROOFING (BY OTHERS) - NO FLASHING.

IMPORTANT:

1. HORIZONTAL LIFELINE ANCHORS ARE DESIGNED TO A MAXIMUM FORCE OF 2,200 lbs. (9.8 kN) WHEN USING "PRO-SHOCK", WITH A FACTOR OF SAFETY OF 2 WITHOUT ANY PERMANENT DEFORMATION, FRACTURE OR DETACHMENT.

2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

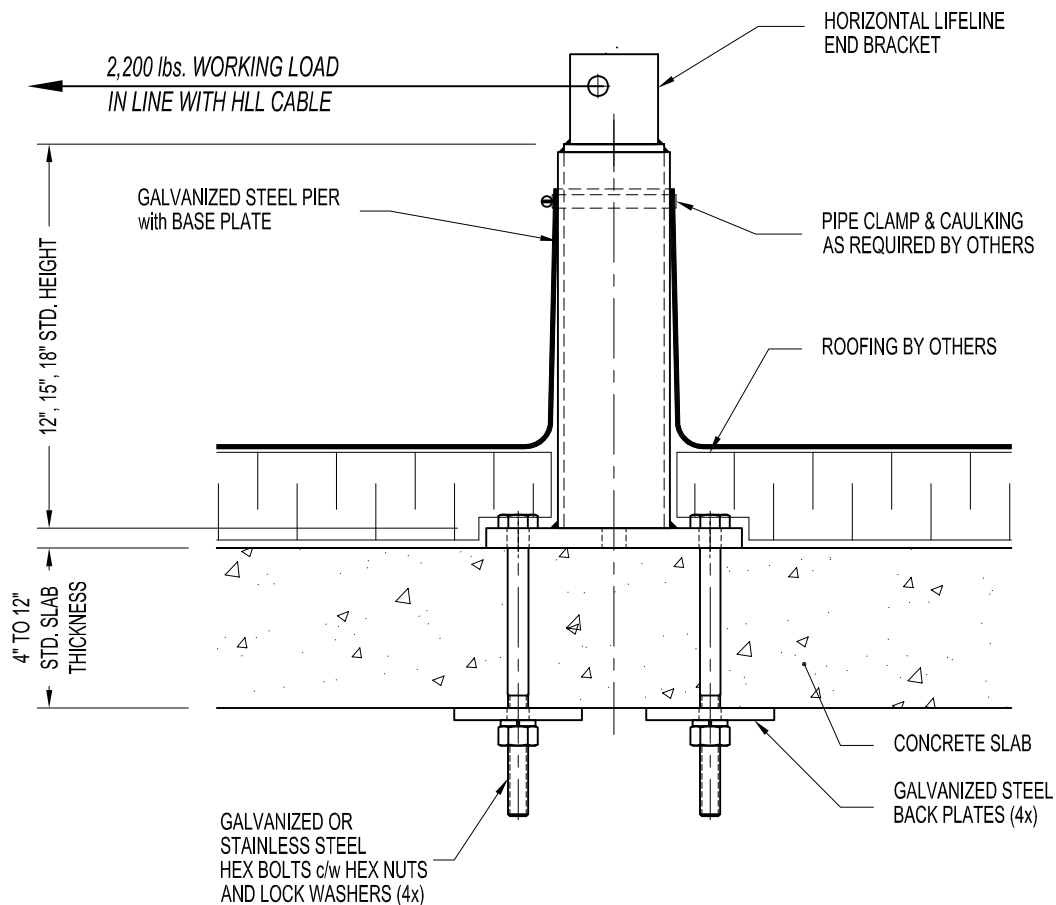

MAX. LIMIT = 18"

HLL-73E-00A4: THROUGH BOLTED HLL END ANCHOR (FOUR BOLTS)