
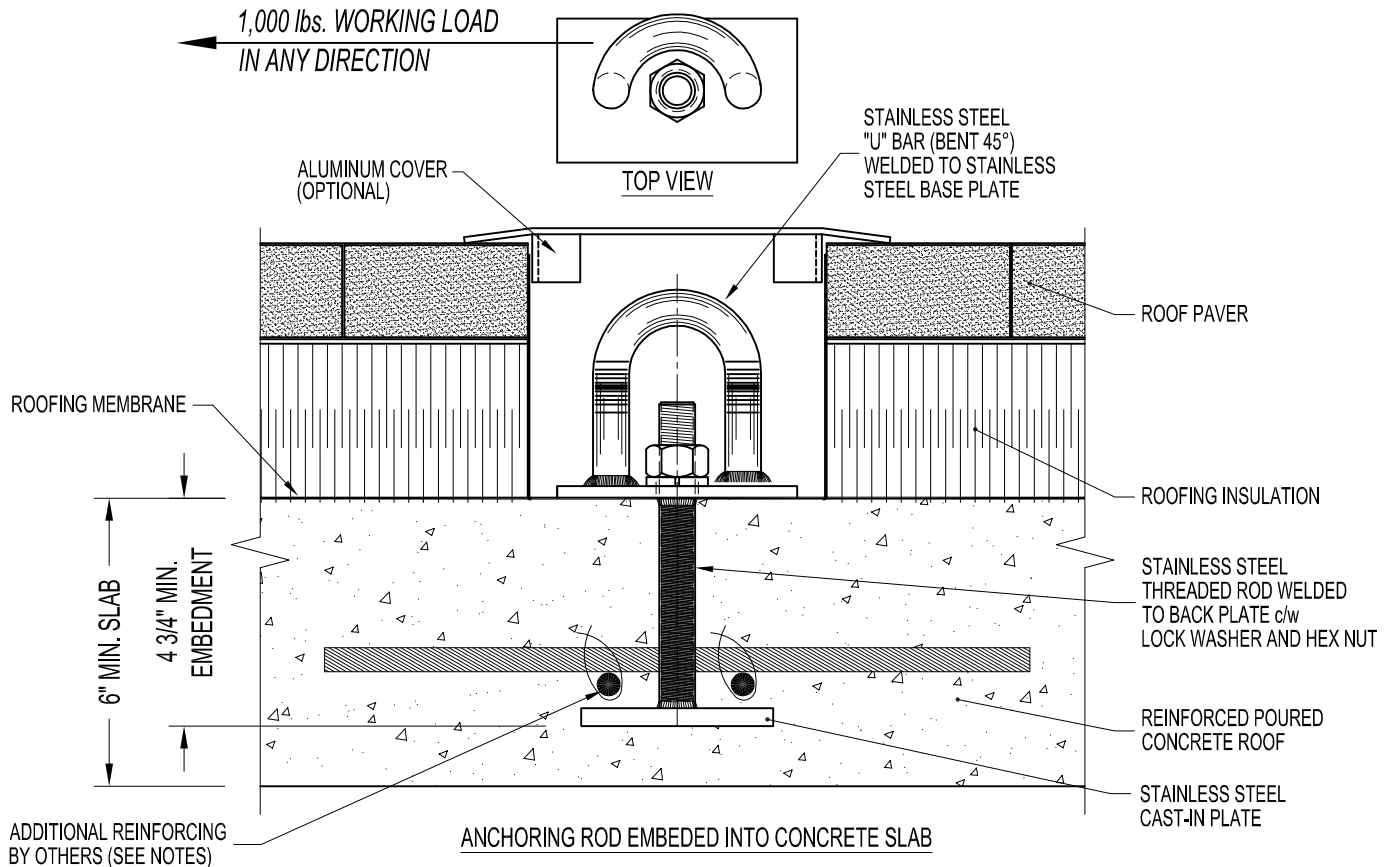


**NOTES:**

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN AS CAST IN REINFORCED POURED CONCRETE ROOF.
3. MINIMUM INTENDED EMBEDMENT DEPTH IN CONCRETE TO BE 4 3/4".
4. MINIMUM CONCRETE SLAB THICKNESS IS 6".

**IMPORTANT:**

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

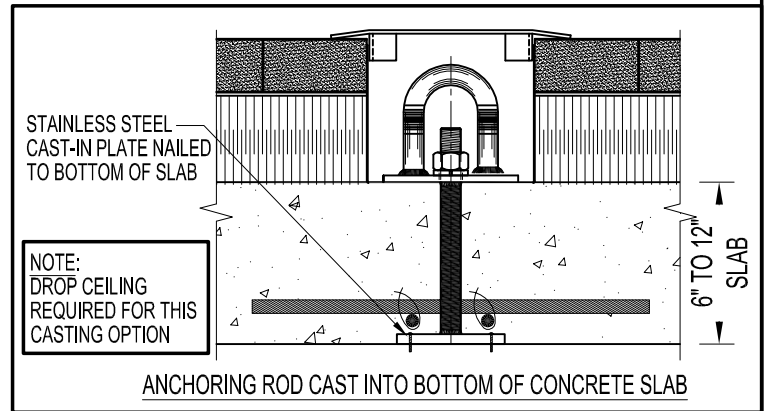



**PB69SP45R: CAST IN PLACE RECESSED ROOF ANCHOR (SINGLE S.S. STUD)**

**NOTES:**

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN AS CAST IN REINFORCED POURED CONCRETE ROOF.
3. MINIMUM INTENDED EMBEDMENT DEPTH IN CONCRETE TO BE 4 3/4".
4. MINIMUM CONCRETE SLAB THICKNESS IS 6".

**IMPORTANT:**

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

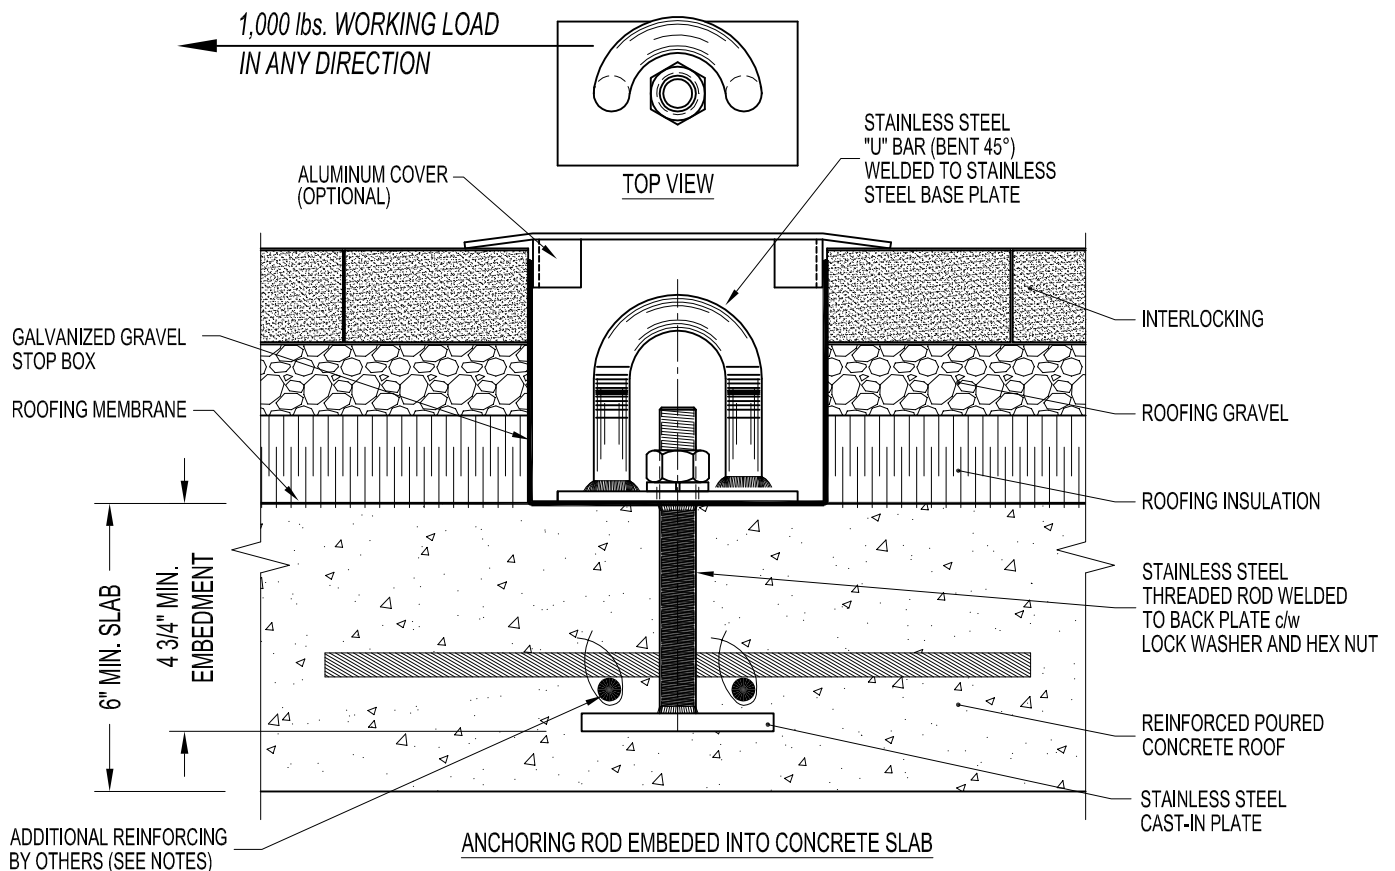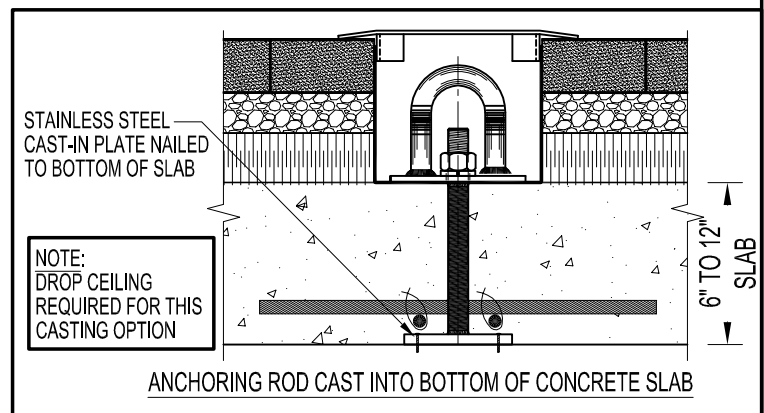

**PB69SP45R: CAST IN PLACE RECESSED ROOF ANCHOR (SINGLE S.S. STUD) w/ GRAVEL BOX**




**NOTES:**

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN AS CAST IN REINFORCED POURED CONCRETE ROOF.
3. MINIMUM INTENDED EMBEDMENT DEPTH IN CONCRETE TO BE 4 3/4".
4. MINIMUM CONCRETE SLAB THICKNESS IS 6".

**IMPORTANT:**

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.

2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

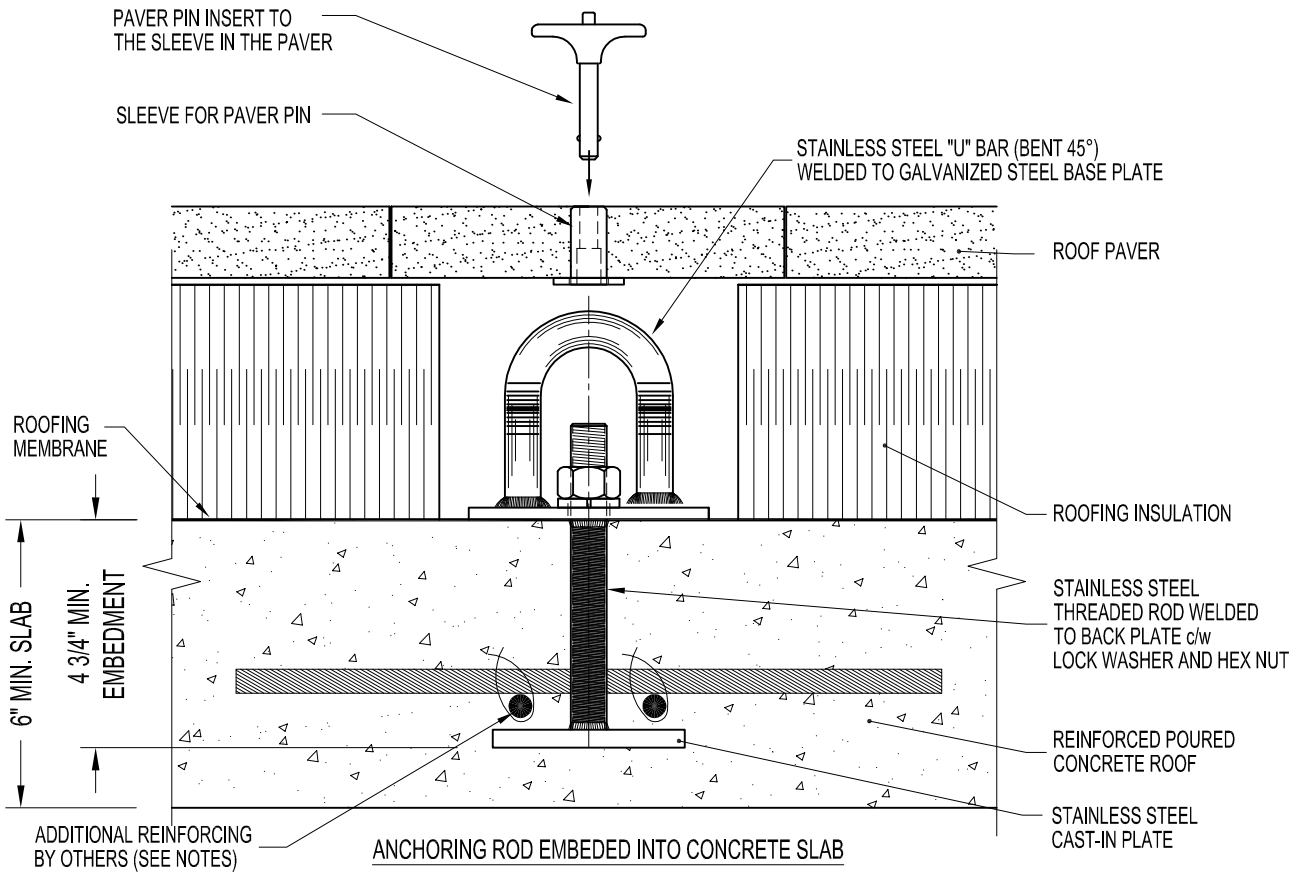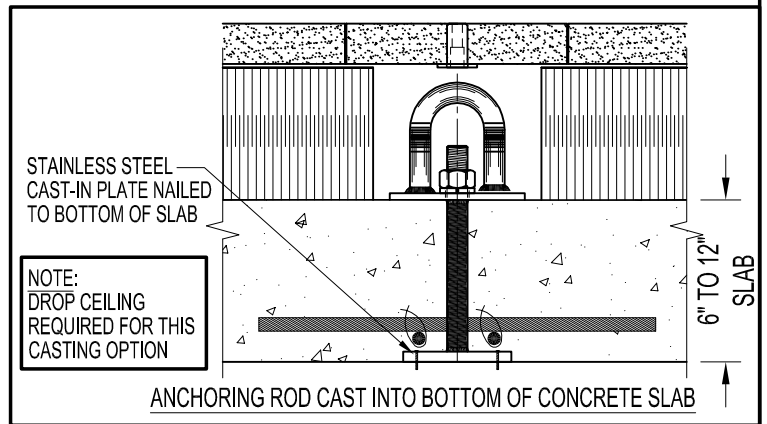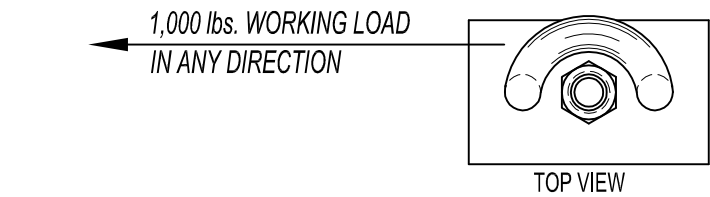

**PB69SP45R: CAST IN PLACE RECESSED ROOF ANCHOR (SINGLE S.S. STUD) w/ PAVER PIN**