


NOTES:

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN IS 12", 15" & 18" HIGH MODELS FOR STANDARD SLAB THICKNESS OF 4" TO 12".
3. ASSEMBLY NOT TO BE USED FOR COMPOSITE CONCRETE AND METAL DECKING.
4. ASSEMBLY SHOWN WITH CONVENTIONAL SINGLE PLY ROOFING (BY OTHERS). - NO FLASHING

IMPORTANT:

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

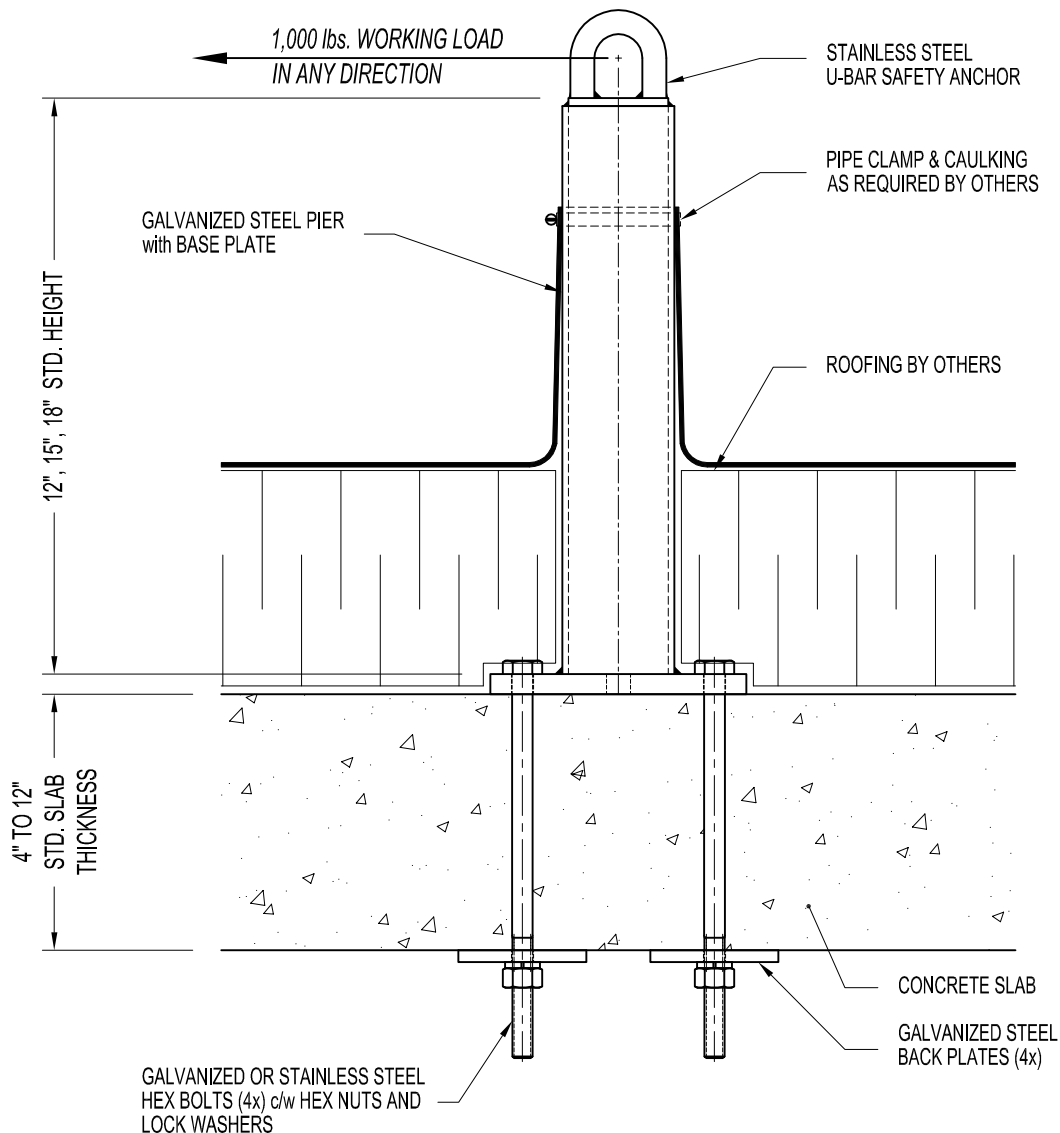

MAX. LIMIT = 18"

PBE73-00A4: THROUGH BOLTED ROOF ANCHOR (FOUR STUDS)