


NOTES:

1. 1,000 lbs. WORKING LOAD IN AXIAL DIRECTION.
2. ASSEMBLY SHOWN IS 20" & 22" HIGH MODELS. MINIMUM SLAB THICKNESS IS 6".
3. ASSEMBLY SHOWN IS BOLT THROUGH VARIOUS WALL THICKNESS.
4. ALL ADHESIVE ANCHORS MUST BE LOAD TESTED.

IMPORTANT:

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.

2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

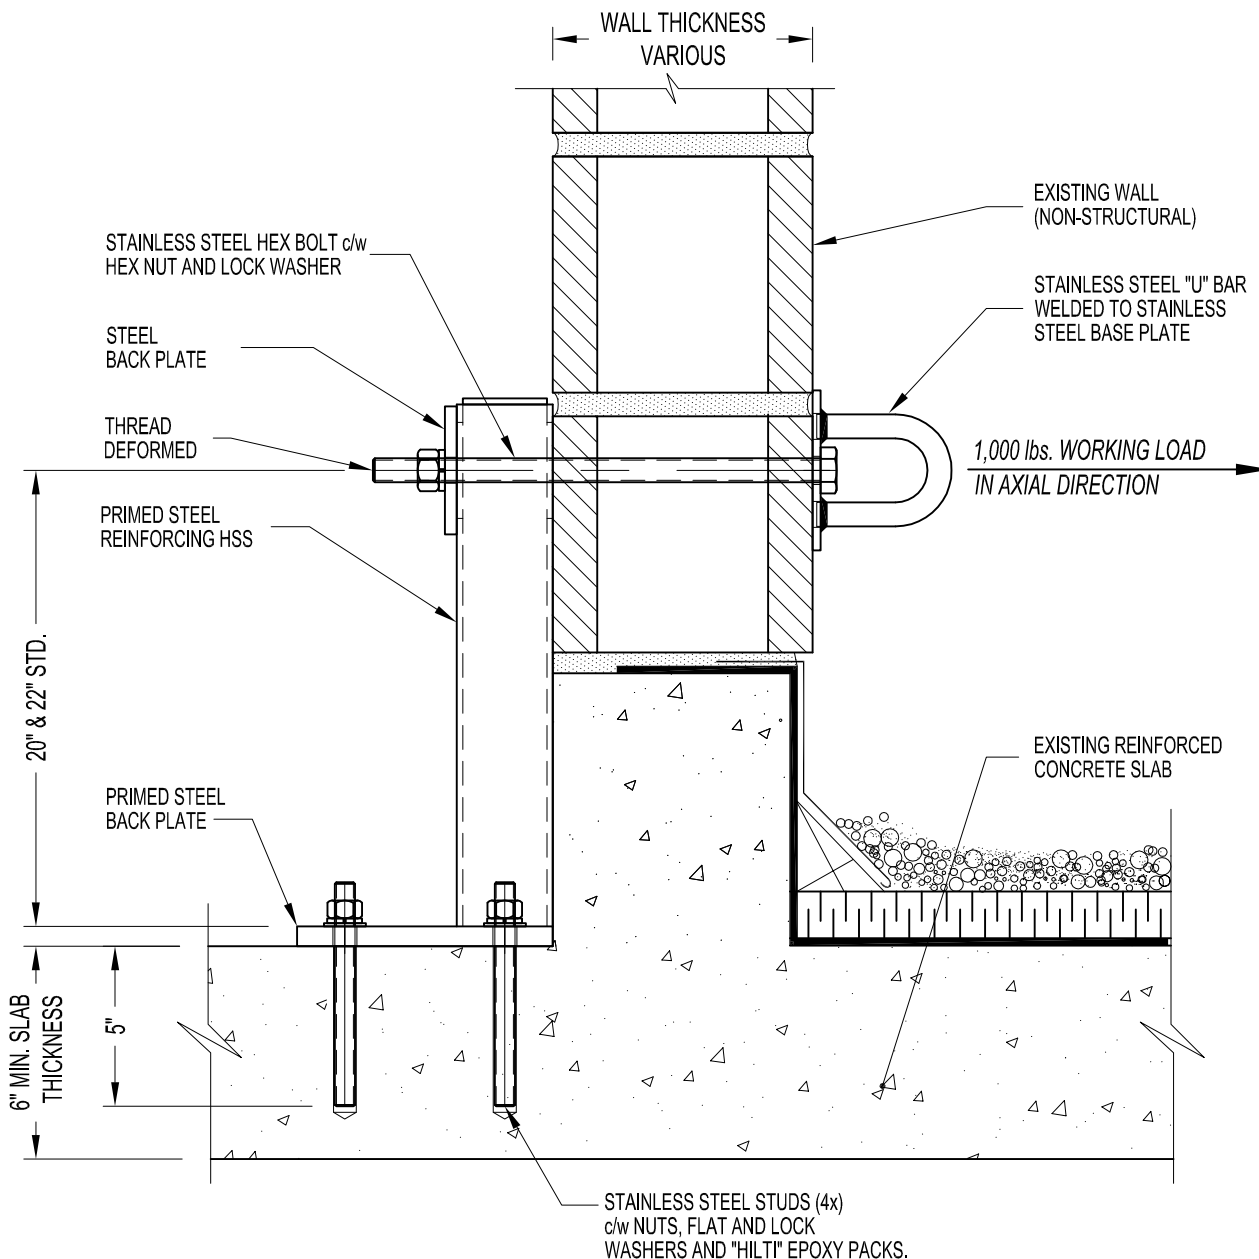

PB93SG-A4S: REINFORCED THROUGH BOLTED ANCHOR (ADHESIVE - 4 BOLTS)